


STAPLELOK SUPERLOK SAE J1467

AE J1467

RYCOLOK are also called CLIP FASTENER & STAPLE

The RYCOLOK male connector uses an O Ring and backup washer, and seals on the smooth bore of the female. The connection is held together by the staple.

The male staple groove (G) aligns with the drilled holes of the female allowing the staple to be inserted. RYCOLOK and RYCO SUPERLOK use different width staples and are therefore NOT interchangeable.

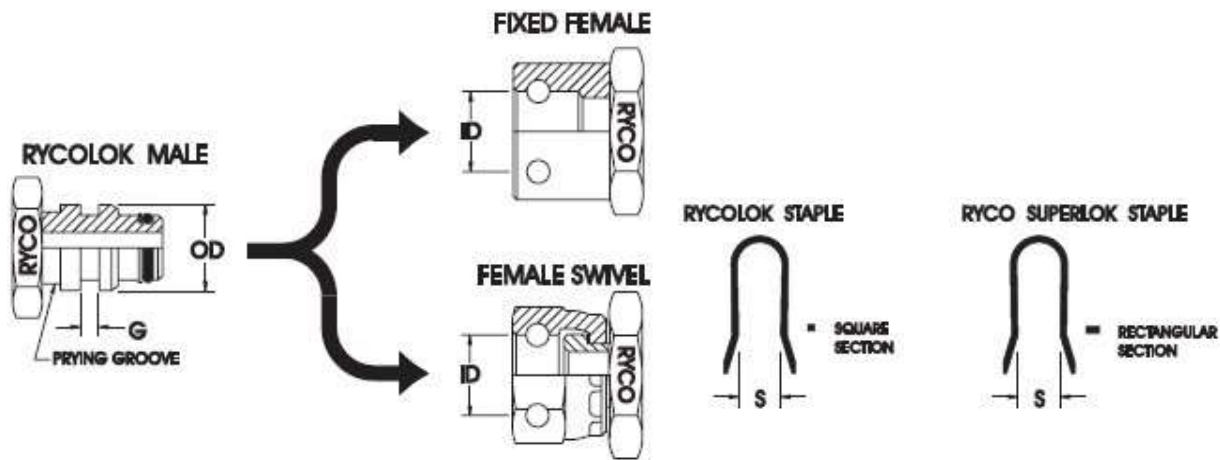

NOMINAL SIZE			NOM. MALE OD & FEMALE ID		RYCOLOK STAPLE SIZE				RYCO SUPERLOK STAPLE SIZE			
DN	inch	Dash	mm	inch	G	G	S	S	G	G	S	S
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
6	1/4	-6	15	0.59	5,1	0.2	8	0.31	—		—	
10	3/8	-10	20	0.79	5,1	0.2	13	0.51	—		—	
12	1/2	-13	24	0.94	5,1	0.2	17	0.67	—		—	
16	5/8	-16	26	1.02	5,1	0.2	19	0.75	—		—	
19	3/4	-20	29	1.14	5,1	0.2	22	0.87	9	0.35	22	0.87
25	1	-25	39	1.53	7,1	0.28	29	1.14	13	0.51	29	1.14
31	1.1/4	-32	46	1.81	7,1	0.28	36	1.42	13	0.51	36	1.42
38	1.1/2	-40	55	2.16	7,1	0.28	45	1.77	13	0.51	45	1.77
51	2	-50	64	2.52	7,1	0.28	54	2.13	13	0.51	54	2.13