


Housing Recess
Dimensions




METRIC.
O Rings

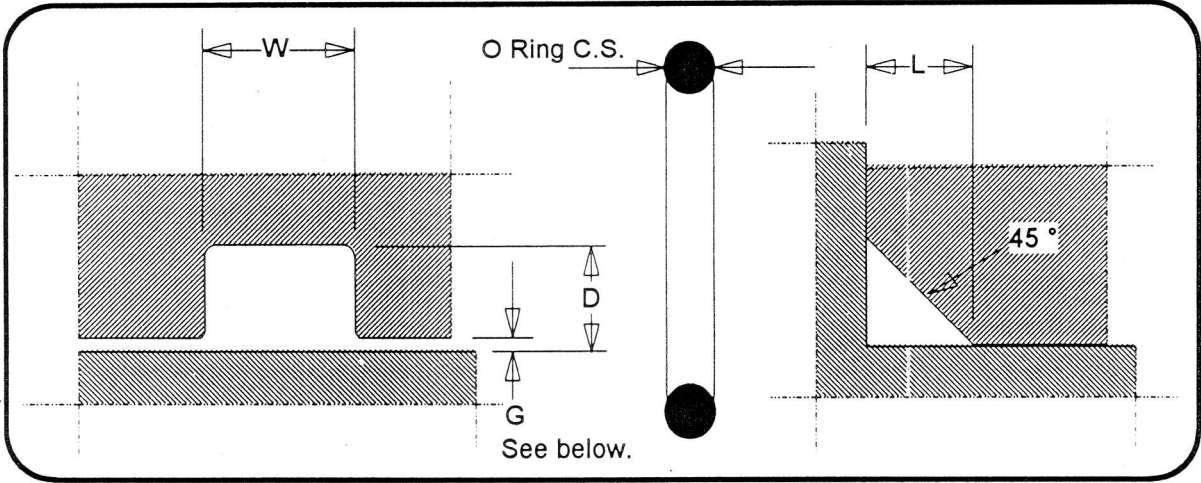

O Ring C.S.	Dynamic		Static		No B/U	One B/U	Two B/U	Triangular	
	D	Tol.	D	Tol.	W	W	W	L	Tol.
1.0	0.90		0.80		1.30	—	—	1.40	
1.2	1.08	+0.00	0.96		1.56	—	—	1.60	
1.5	1.35	- 0.05	1.20		1.95	—	—	2.00	
1.9	1.72		1.53		2.57	4.10	6.00	2.65	
2.0	1.80		1.60	+0.00	2.60	4.10	5.50	2.70	
2.4	2.16		1.92	- 0.05	3.12	4.60	6.00	3.20	- 0.00
2.5	2.25		2.00		3.25	4.80	6.20	3.40	+0.05
2.7	2.41		2.13		3.50	4.80	6.50	3.65	
3.0	2.70	+0.06	2.40		3.90	5.40	6.80	4.00	
3.1	2.75	- 0.06	2.42	+0.10	4.00	5.50	6.90	4.10	
3.5	3.15		2.80	- 0.10	4.55	6.10	7.50	4.80	
4.0	3.60		3.20		5.20	6.70	8.10	5.40	
5.0	4.50		4.00		6.50	8.40	10.20	6.70	- 0.00
5.7	5.18	+0.10	4.60	+0.15	7.47	9.30	11.10	7.70	+0.10
6.0	5.40	- 0.10	4.80	- 0.15	7.80	9.90	12.30	8.00	
8.4	7.65		6.80		11.05	13.20	15.40	11.40	

TABLE G.

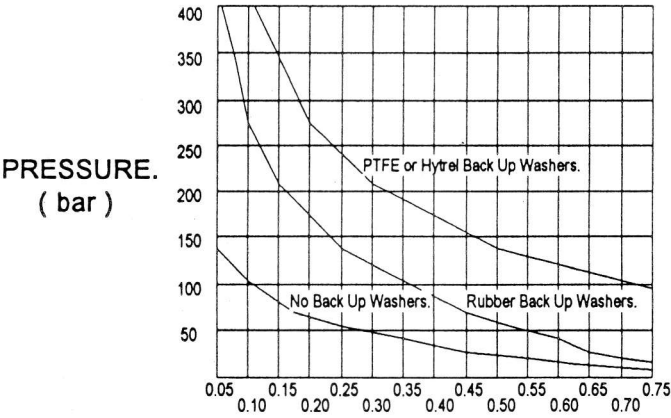

EXTRUSION GAP G. { m.m. }